M-6200 SPECIFICATION SHEET

t&rex®



6 IN. CONTINUOUS HANGER FOR GUTTERS

PRODUCT

- · Product for new rain gutters
- · Protects from snow and ice
- · Supports 232 lbs. (105 kg)/linear foot
- · Uniform support across the entire length
- · Shell structure

ALUMINUM

- 40-year anti-clog warranty
- · Lifetime guarantee on material and sturdiness
- Invisible from the ground
- · Package contains:

· Colour: Gold Backer

· Grade: 3105 H24


-7.5' (2.29 m) x 34 pcs = 255' (77 m)

· Thickness: 0.0175" (including finish)

- 300 screws (see description below)

PERFORATIONS

- 7/64" (2.8 mm) in diameter
- Drains 36" (914 mm) of water per hour
- Offers the perfect balance between maximum drainage and debris protection



intertek Total Quality, Assured


View the results of our independent drainage, resistance, and wind tunnel tests at www.alu-rex.com/en/tests.

Tolerances


x.xxx'' = +/-0.005'' (0.127 mm)

x.xxxx'' = +/-0.0005'' (0.0127 mm)

6" GUTTER PROFILE

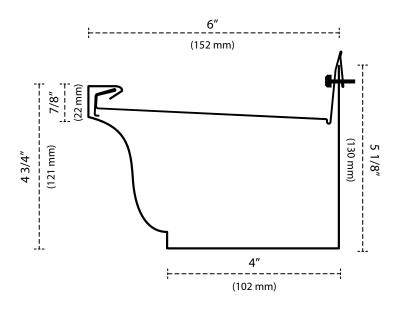

This product is protected by a number of patents.



SCREWS

- This hanger is installed with self-sealing screws made of zinc #10 -1½" (38 mm) with ¼" (6.4 mm) hexagon heads and integrated rubber gaskets.
- Reinforces the gutter so it will stay in place year after year without needing to be removed or replaced.
- Reduces the risk of water seeping into the fascia.

